



□ P.O. BOX 265
 OGDENSBURG, NY
 U.S.A. 13669-0265
 TEL: (315) 472-5270
 FAX: (613) 226-2802


TEL: 1-800-265-6681
 FAX: 1-800-561-1970
 U.S.A. & CANADA

e-mail: info@avtechpulse.com

☒ BOX 5120 STN. F
 OTTAWA, ONTARIO
 CANADA K2C 3H4
 TEL: (613) 226-5772
 FAX: (613) 226-2802


INSTRUCTIONS

MODEL AVN-4-CL2

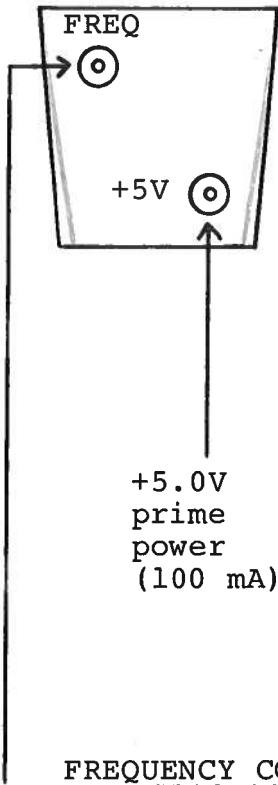


- a) +3.5 to +14 Volts
- b) +3.5 to +14 Volts
- c) +5.7 to +8.0 Volts

$R_{IN} \geq 10K$

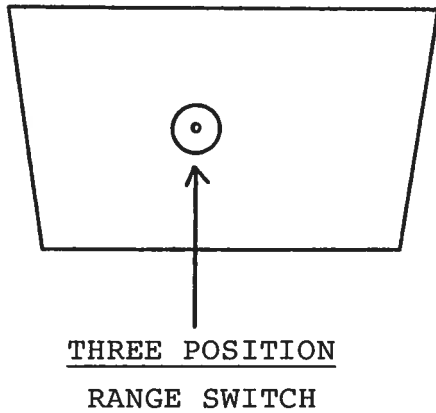

- a) 50 - 100 MHz
- b) 100 - 200 MHz
- c) 200 - 250 MHz

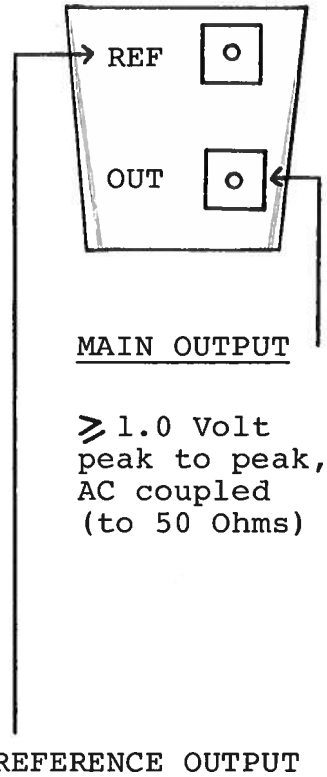

≥ 1.0 Volt
 peak to peak,
 AC coupled
 (to 50 Ohms)

Attenuated (x25)
 coincident replica
 of main output

Feb. 6/97

for FOIC