




info@avtechpulse.com
http://www.avtechpulse.com/

Tel: 888-670-8729 (USA & Canada)
or +1-613-686-6675 (Worldwide)

BOX 5120, LCD MERIVALE
OTTAWA, CANADA K2C3H5

PERFORMANCE CHECKSHEET


Model: AV-107E-B-PN-X2
Type: Pulsed Laser Diode Driver
S.N.: 14296
Date: November 3, 2022

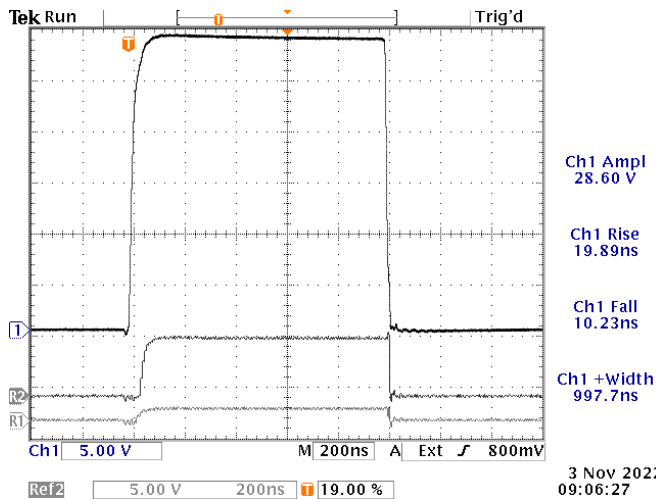

3 Nov 2022
09:06:27

+0.1 / +0.5 / +2.5A into the supplied AV-CTL11-ENC test load (11.52Ω). 1 us pulse width. 5 V/div, 200 ns/div.

- a) Output Signal Amplitude: up to $\pm 2.5A$
- b) Pulse Width (FWHM): 200 ns to 200 us
- c) Rise Time (20%-80%): < 30 ns
- d) Fall Time (80%-20%): < 30 ns
- e) PRF: 1 Hz – 1 kHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz.

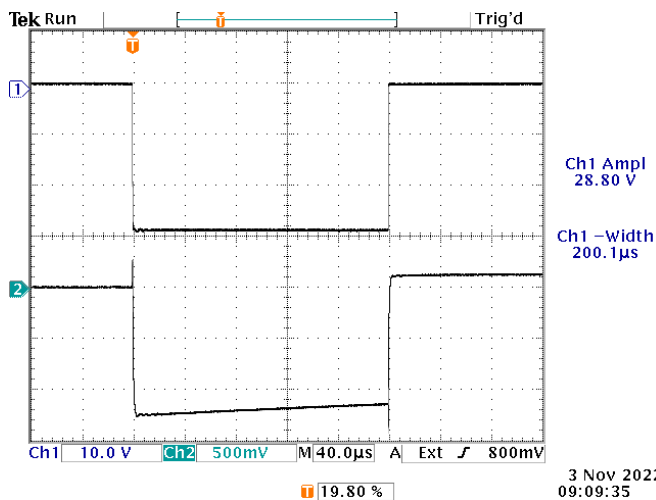

3 Nov 2022
09:09:35

Top: -2.5A into the supplied AV-CTL11-ENC test load (11.52Ω). 200 us pulse width. 10 V/div, 40 us/div.
Bottom: MON MAX output into 50Ω (500 mV/div).

References levels: 20%, 80%.