



□ P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265  
TEL: (315) 472-5270  
FAX: (613) 226-2802


TEL: 1-800-265-6681  
FAX: 1-800-561-1970

e-mail: info@avtechpulse.com  
http://www.avtechpulse.com/

☒ BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4  
TEL: (613) 226-5772  
FAX: (613) 226-2802

PERFORMANCE CHECKSHEET

Model: AV-156F-B-RP  
S.N.: 10920  
Date: June 4, 2004

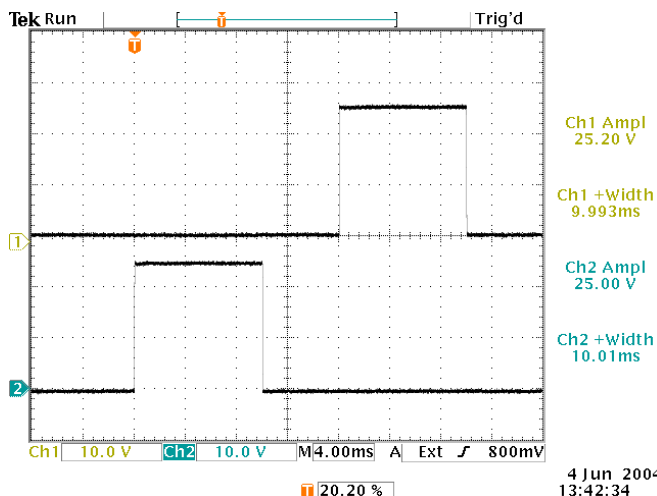

a) Output Signal Amplitude: 0 - 10A

b) Pulse Width: 1 - 100 ms

c) Rise Time: < 4 us


d) Fall Time: < 4 us

e) PRF: 0.5 - 50 Hz

4 Jun 2004 13:42:34  
Top: OUT1, 10A to 2.5Ω load, 10 ms PW, 16 ms delay  
Bottom: OUT2, 10A to 5.0Ω load, 10 ms PW  
Both: 10 V/div, 4 ms/div, PRF = 5 Hz.

f) Jitter, Stability: OK

g) Prime Power: 100-240V AC, 50-60 Hz

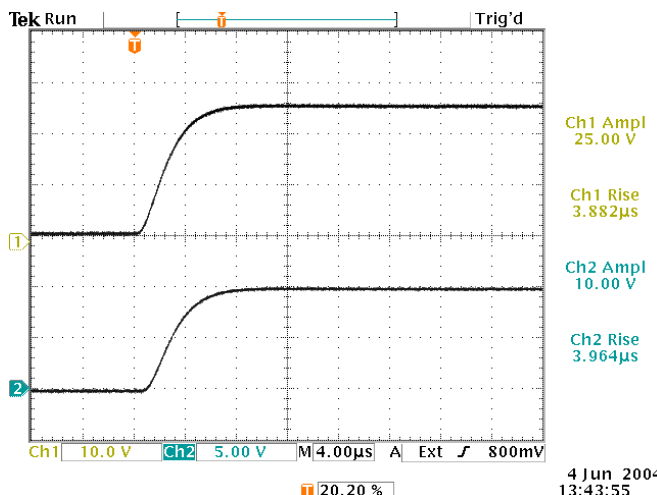

h) Inter-channel delay: 0 - 1000 ms

4 Jun 2004 13:43:55  
Top: OUT1, 10A to 2.5Ω load, 10 ms PW, 10 V/div.  
Bottom: MON1 to 10 kΩ load, 5V/div.  
Both: PRF = 5 Hz, 4 us/div.

References levels: 10%, 90%.