



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-226-5772 (Intl)  
FAX: 800-561-1970 (USA & Canada) or +1-613-226-2802 (Intl)


BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AV-156G-B-TNT-PW-R5  
Type: Pulsed Constant Current Generator  
S.N.: 12038  
Date: August 13, 2008

Rise & Fall Time Test

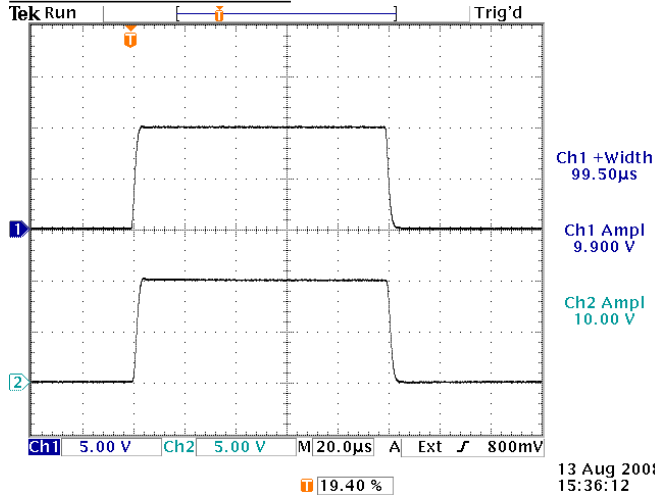


- a) Output Signal Amplitude: 0.01 to 10 A
- b) Pulse Width (FWHM): 10 us - 100 ms
- c) Rise Time (20%-80%): < 4 us
- d) Fall Time (80%-20%): < 4 us
- e) PRF: 1 Hz - 10 kHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz.

Top: OUT into 1.00Ω load. 10 Hz, 100 us, +10A.  
Bottom: Monitor output. 5 V/div, 20 us/div.

References levels: 20%, 80%.

Wide Pulse Test

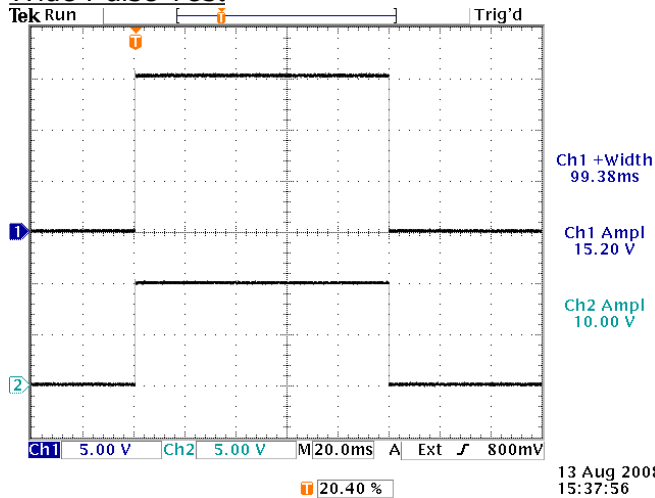

Top: OUT into 1.518Ω load. 1 Hz, 100 ms, +10A.  
Bottom: Monitor output. 5 V/div, 20 ms/div.