

AVTECH ELECTROSYSTEMS LTD.

NANOSECOND WAVEFORM ELECTRONICS
SINCE 1975

P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (315) 883-1328

TEL: 1-800-265-6681
FAX: 1-800-561-1970


e-mail: info@avtechpulse.com
<http://www.avtechpulse.com/>

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 686-6679

PERFORMANCE CHECKSHEET

Model: AVX-FD3-PS-IP
S.N.: 11427
Date: February 24, 2006

High Frequency / Small Signal Test

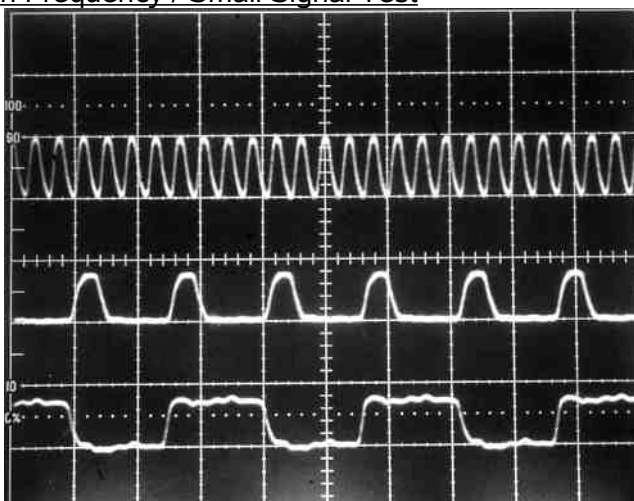

Top: 250 MHz in, AC mode, 200 mV/div, 10 ns/div.
Middle: OUT 1 into 50Ω, ECL, ÷4. 1 V/div, 10 ns/div.
Bottom: OUT 2 into 50Ω, ECL, ÷4. 1 V/div, 10 ns/div.

a) Output Signal Amplitude: ECL to 50Ω to ground, or 50Ω to -2V.


b) Division factor: 0 to 65535

c) PRF: 0 - 250 MHz

d) Jitter, Stability: OK

e) Prime Power: 100-240V AC, 50-60 Hz.

Operate/Reset Test

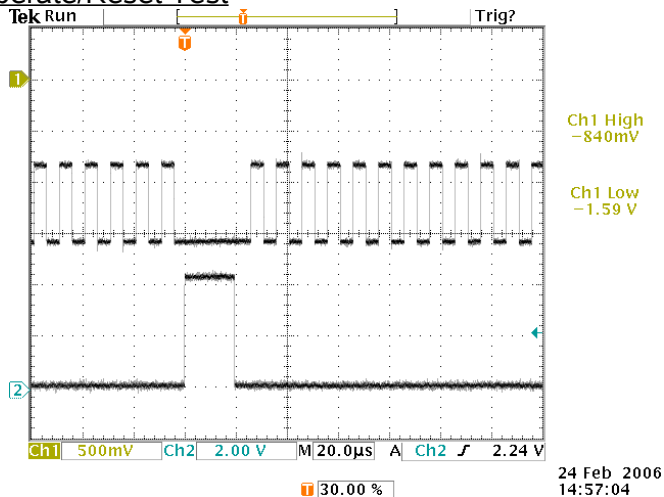

Top: OUT, ÷ 2, $f_{IN} = 200$ kHz, 0.5 V/div, 20 us/div.
Bottom: RESET input. 2V/div, 20 us/div.