

P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (613) 226-2802


TEL: 1-800-265-6681
FAX: 1-800-561-1970

e-mail: info@avtechpulse.com
http://www.avtechpulse.com/

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 226-2802


PERFORMANCE CHECKSHEET

Model: AV-151H-B
S.N.: 11239
Date: August 4, 2005

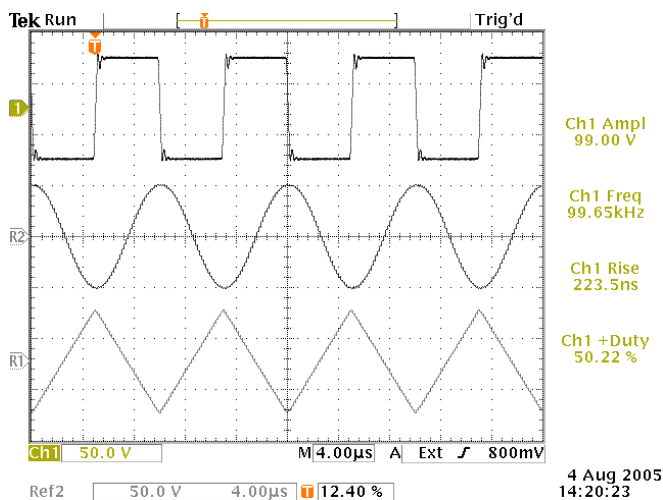

Square, Sine, and Triangle outputs into a 10 kΩ load.
100 kHz. 50 V/div, 4 us/div.

- a) Output Signal Amplitude: ±50V, to 10 kΩ
- b) Waveforms: sine, triangle, square
- c) Rise Time: 0.3 us (for square wave)
- d) Fall Time: 0.3 us (for square wave)
- e) PRF: 1 Hz to 1 MHz

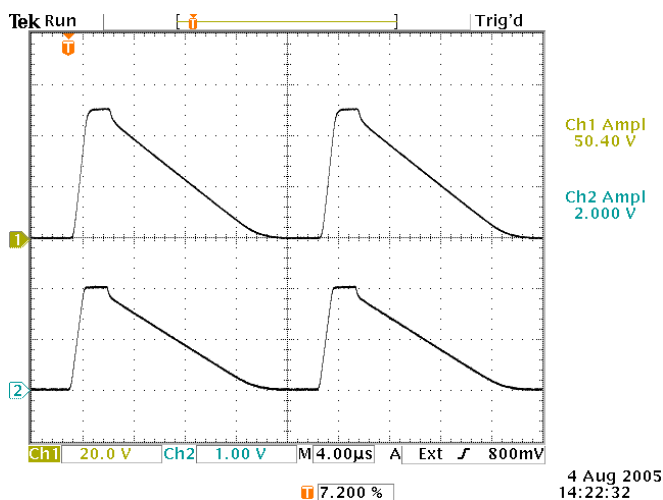

EXT mode, maximum gain.
Top: +50V pulse out. 20 V/div, 4 us/div.
Bottom: +2V pulse in. 1 V/div, 4 us/div.

References levels: 10%, 90%.

- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz