

P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (613) 226-2802

TEL: 1-800-265-6681
FAX: 1-800-561-1970


e-mail: info@avtechpulse.com
<http://www.avtechpulse.com/>

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 226-2802

PERFORMANCE CHECKSHEET

Model: AV-1023-C
S.N.: 11346
Date: October 31, 2005

Complex Waveform Test

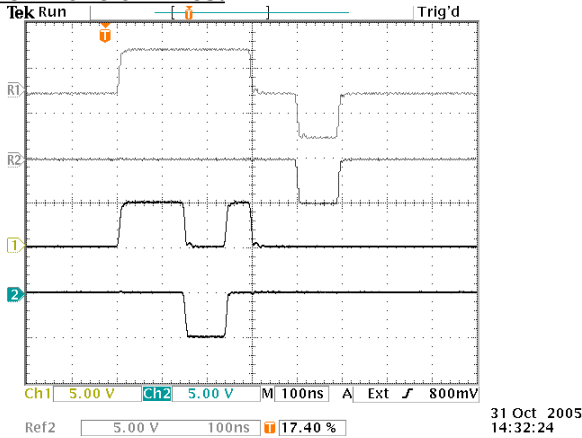

a) Output Signal Amplitude: 0 to ±10V

b) Pulse Width: 50 ns - 500 ms

c) Rise Time: < 10 ns

d) Fall Time: < 10 ns

e) PRF: 1 Hz - 10 MHz

Waveforms, Top to Bottom:


- 1) A+B, A has +5V amplitude, B has -5V ampl.
- 2) B
- 3) Same as 1, but with B delay reduced
- 4) Same as 2, but with B delay reduced

All: 5V/div, 100 ns/div. $R_{LOAD} = 50\Omega$, $Z_{OUT} = 50\Omega$

f) Jitter, Stability: OK

g) Prime Power: 120/240V AC, 50-60 Hz

Rise & Fall Time Test

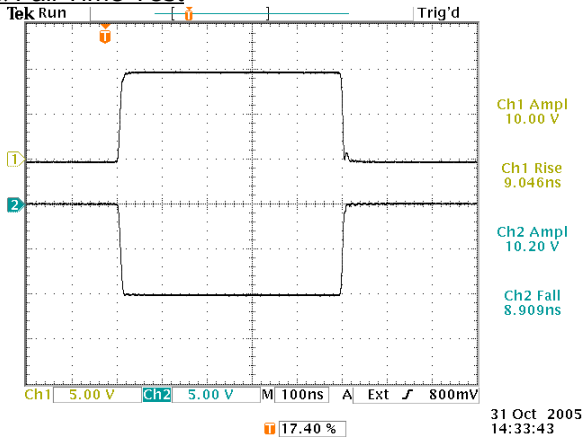

Top: OUT A, +10V to 50Ω. 5 V/div, 100 ns/div.
Bottom: OUT B, -10V to 50Ω. 5 V/div, 100 ns/div.

References levels: 10%, 90%.