



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)  
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)


BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AV-110B-PS-AC02-D  
Type: High-Voltage Dual-Channel Linear Amplifier  
S.N.: 12438  
Date: May 18, 2010

Rise and Fall Time Test

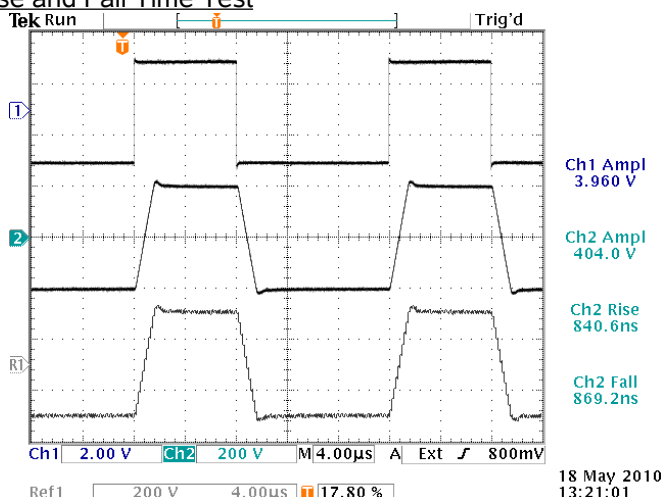

a) Output Signal Amplitude: 0 to ±200V,  
to R ≥ 50 kΩ

b) Gain: ×1 to ×100

c) Rise Time (20%-80%): < 1 us

d) Fall Time (80%-20%): < 1 us


e) Bandwidth: 350 kHz

f) Jitter, Stability: OK

g) Prime Power: 100-240V AC, 50-60 Hz.

Top: ±2V input (connected to IN A and IN B). 2V/div.  
Middle: OUT A (±200V) into a 50 kΩ load. 200V/div.  
Bottom: OUT B (±200V) into a 50 kΩ load. 200V/div.  
All: 4 us/div.

Arbitrary Input Test

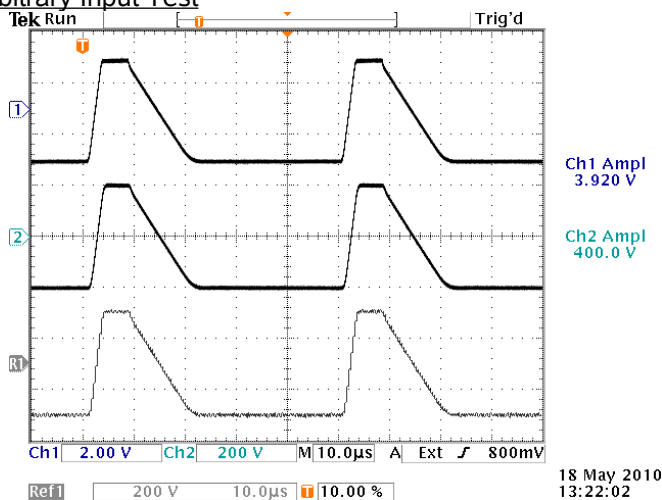

Top: ±2V input (connected to IN A and IN B). 2V/div.  
Middle: OUT A (±200V) into a 50 kΩ load. 200V/div.  
Bottom: OUT B (±200V) into a 50 kΩ load. 200V/div.  
All: 10 us/div.

Waveform references levels: 20%, 80%.