



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)  
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)


BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVO-6D-B-P-EA  
Type: High Current Pulse Generator and Laser Diode Driver  
S.N.: 12663  
Date: July 8, 2011

Mainframe Output

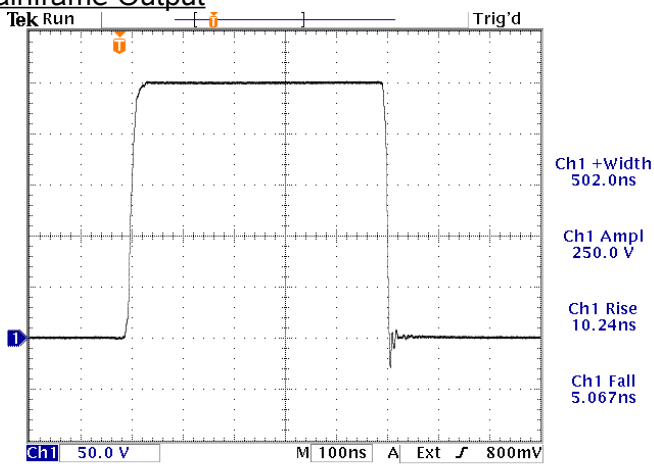


8 Jul 2011  
10:22:54

+250V, 500 ns, into 50Ω (no output module).  
1 kHz. 50 V/div, 100 ns/div.

- a) Output Signal Amplitude: 0 to +10A
- b) Pulse Width (FWHM): 50 ns – 5 us
- c) Rise Time (20%-80%): < 15 ns
- d) Fall Time (80%-20%): < 15 ns
- e) PRF: 1 Hz - 10 kHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz.

With Output Module

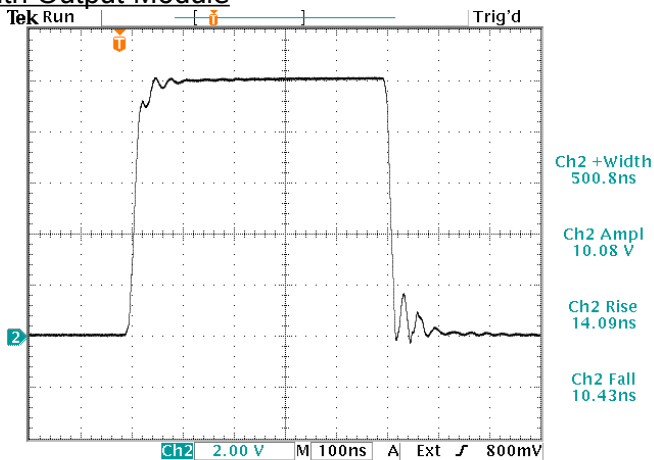

8 Jul 2011  
10:25:42

Output of a Tektronix CT-2 current probe (into 50Ω) for  
a +250V/+10A pulse into the output module, with a  
1N5819 diode installed as the DUT. 2 A/div, 100 ns/div.

References levels: 20%, 80%.