



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-226-5772 (Intl)  
FAX: 800-561-1970 (USA & Canada) or +1-613-226-2802 (Intl)

BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVO-9H-B-P1B-T1B-P-KMP1  
Type: Ultra-High-Speed Laser Diode Driver  
S.N.: 11784  
Date: August 7, 2007

Output Amplitude: 0 to +103V, to 50Ω  
Pulse Width (FWHM): 10 – 200 ns  
Rise Time (20%-80%): ≤ 700 ps  
Fall Time (80%-20%): ≤ 700 ps  
PRF: 1 Hz - 50 kHz  
Jitter, Stability: OK  
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →



Test Waveforms

Mainframe output, +103V into 50 Ohms, 10 kHz,  
200 ns pulse width, rising edge:

Mainframe output, +103V into 50 Ohms, 10 kHz,  
200 ns pulse width, falling edge:

1 ns/div. 20 V/div (20 mV × 60 dB, = 0.4 A/div):

2 ns/div. 20 V/div (20 mV × 60 dB, = 0.4 A/div):

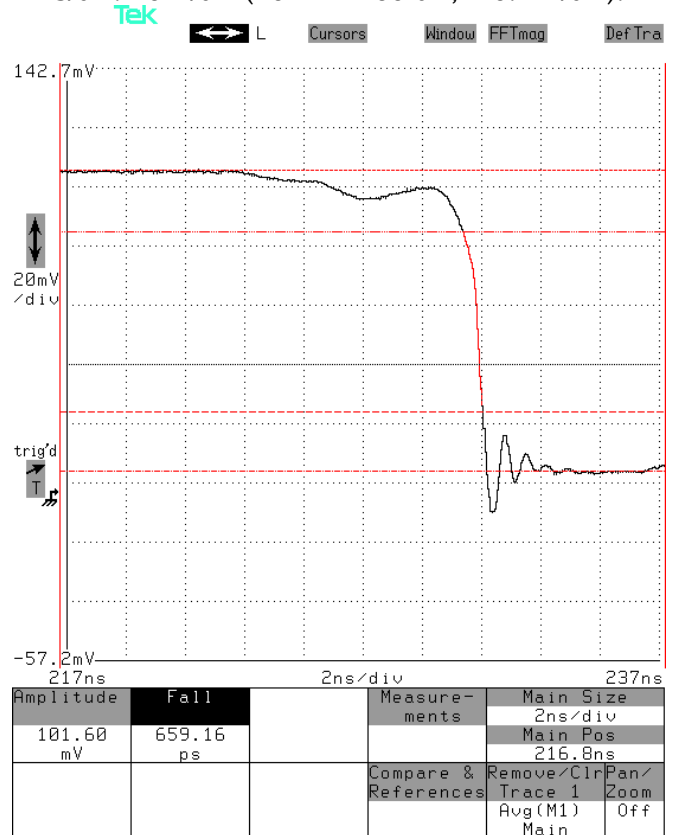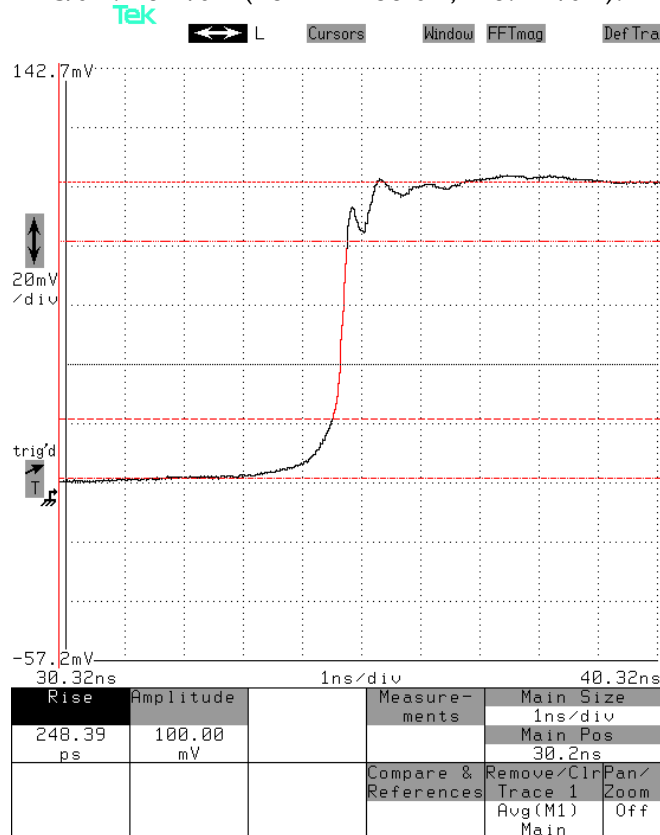


Mainframe output, +103V into 50 Ohms, 10 kHz,  
200 ns pulse width, full pulse:

50 ns/div. 20 V/div (20 mV × 60 dB, = 0.4 A/div):



Mainframe output, +103V into 50 Ohms, 10 kHz,  
10 ns pulse width, full pulse:

2 ns/div. 20 V/div (20 mV × 60 dB, = 0.4 A/div):

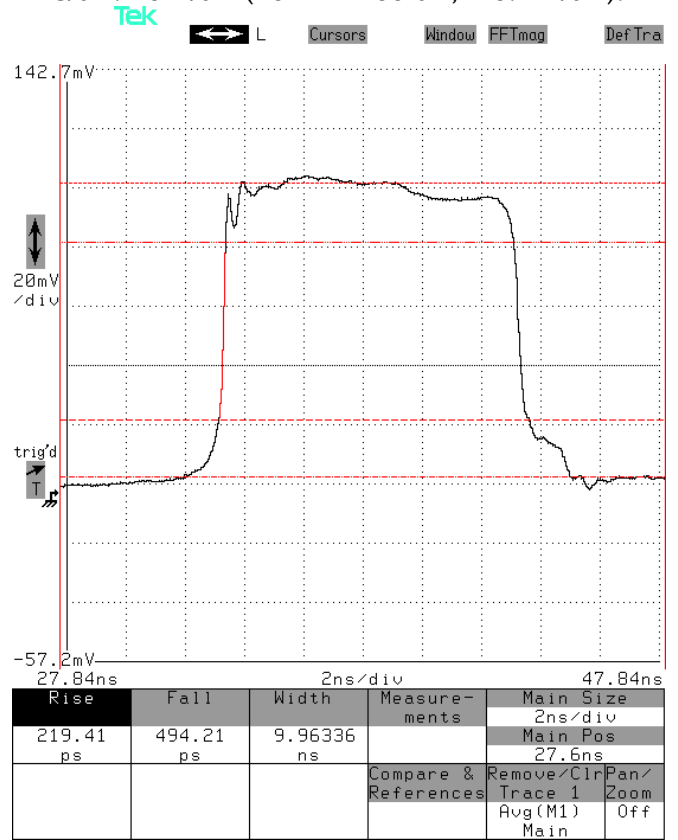

“M1” output of AVX-S2-T1B-P1B-KMP1 into 50 Ohms, for +103V, 10 kHz, 100 ns pulse width:

20 ns/div. 2 V/div (20 mV × 40 dB, ≈ 0.44 A/div):

