

P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (613) 226-2802


TEL: 1-800-265-6681
FAX: 1-800-561-1970

e-mail: info@avtechpulse.com
<http://www.avtechpulse.com/>

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 226-2802

PERFORMANCE CHECKSHEET

Model: AVOZ-D2-B
S.N.: 11398
Date: February 2, 2006

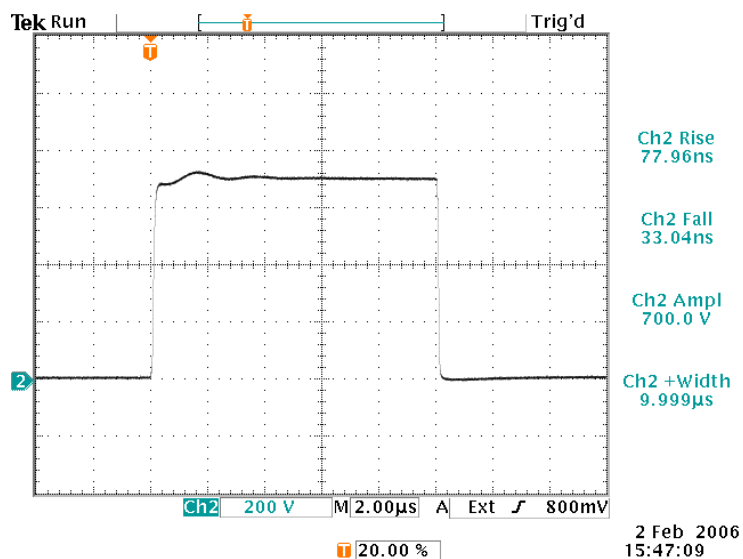

- a) Output Signal Amplitude: 0 to +700V
- b) Pulse Width (FWHM): 200 ns - 10 us, 0.05% duty cycle
- c) Rise Time (20%-80%): < 100 ns
- d) Fall Time (20%-80%): < 100 ns
- e) PRF: 1 Hz – 2.5 kHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz.

50 Hz, 10 us, +700V into a 10Ω load, connected using the AVOZ-D2-T output module and five coaxial cables.

200 V/div, 2 us/div.

References levels: 20%, 80%.