

P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265


TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVOZ-E3-B-AC03-P
Type: High-Voltage, High-Current Pulse Generator
S.N.: 12782
Date: February 8, 2012

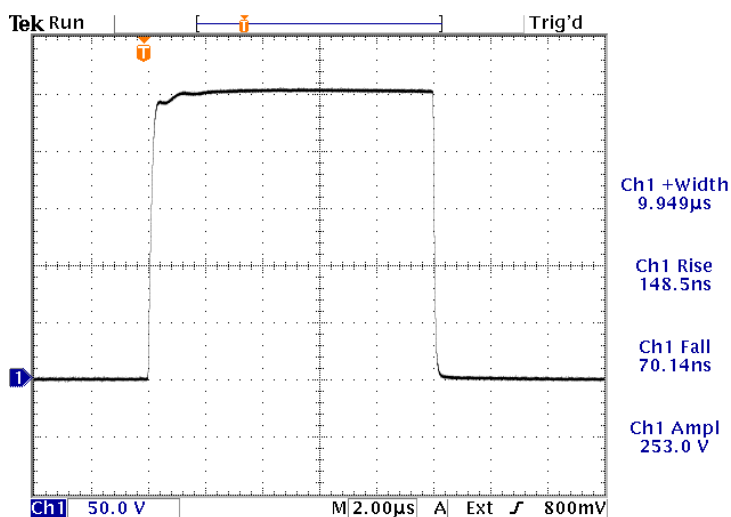

8 Feb 2012
10:36:31

100 Hz, 10 us, +250V into a 1.0 Ohm test load installed
on the rear-panel output connector.

50 V/div, 2 us/div.

- a) Output Signal Amplitude: up to +250V
- b) Pulse Width (FWHM): 200 ns - 10 us
- c) Rise Time (20%-80%): < 150 ns
- d) Fall Time (20%-80%): < 150 ns
- e) PRF: 1 Hz – 1 kHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz.

References levels: 20%, 80%.