



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H5

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVX-2
Type: Inverting Transformer
S.N.: 13798
Date: November 20, 2018

Impedance: 50 Ohms
Maximum input: 50V
Maximum pulse width: 10 ns
Rise time (20%-80%): < 60 ps
Drop: < 10 %

Basic specifications: →



Rise-Time Test

Fast-rise-time input to AVX-2,

500 ps/div. 2 V/div (200 mV/div × 20 dB):

Corresponding output of AVX-2,


500 ps/div. 2 V/div (200 mV/div × 20 dB):

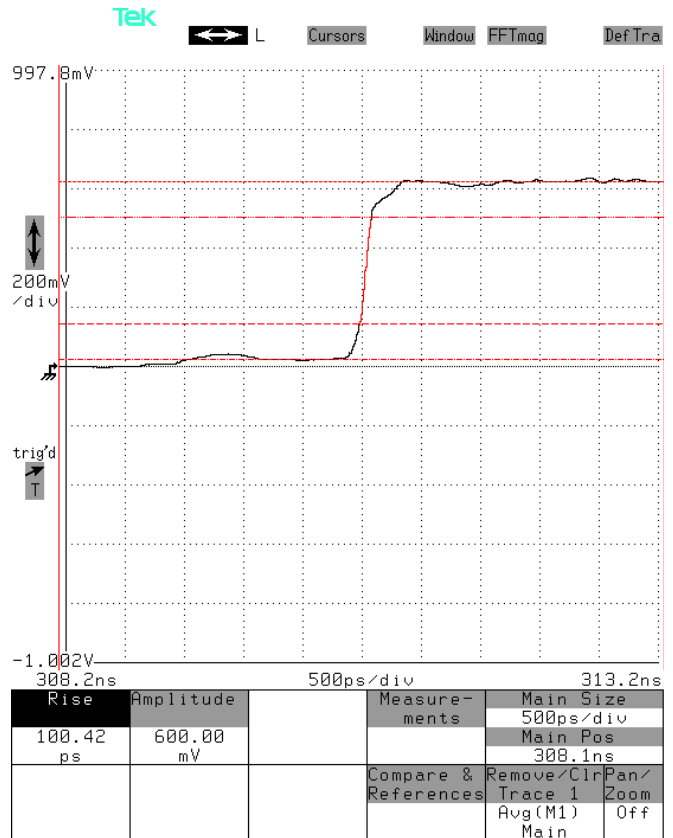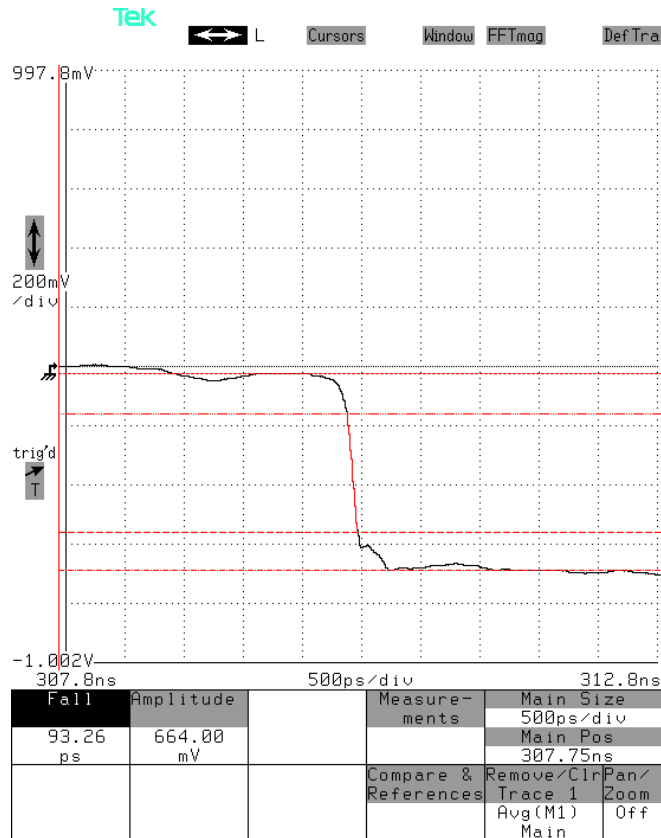

Maximum Amplitude / Pulse Width Test

High-voltage input to AVX-2 (from AVIR-4-B),

5 ns/div. 20 V/div (200 mV/div × 40 dB):

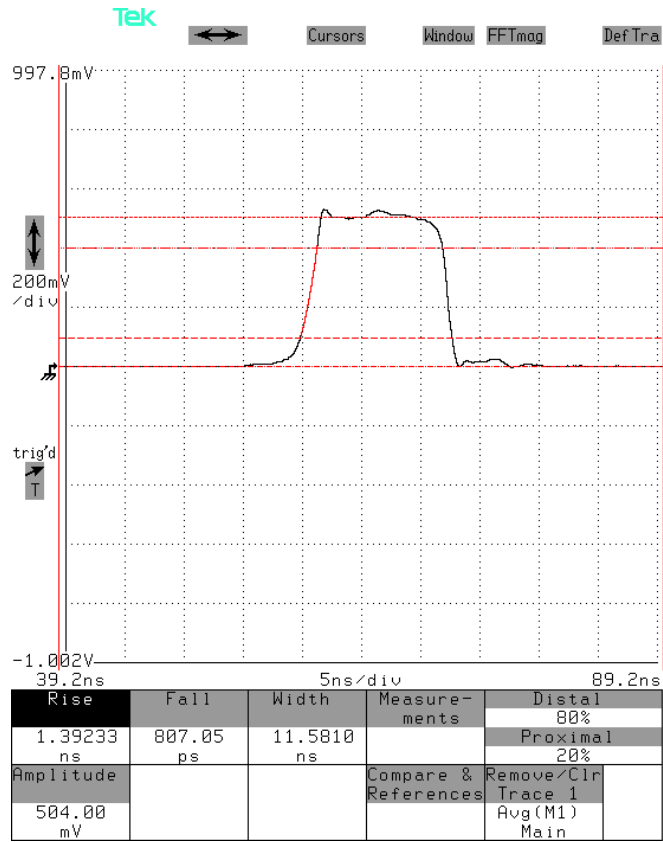

Corresponding output of AVX-2,

5 ns/div. 20 V/div (200 mV/div × 40 dB):

