



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-226-5772 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-226-2802 (Intl)


BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVR-5B-B-EA-P
Type: High Voltage Pulse Generator
S.N.: 12080
Date: September 15, 2008


Rise & Fall Time Test

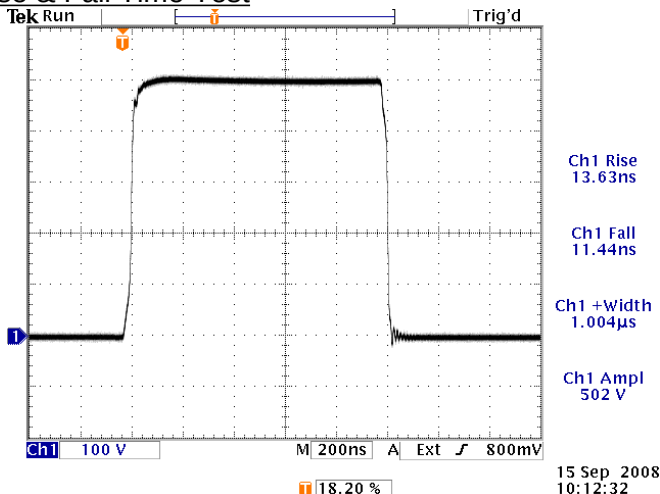

1 kHz, 1 us, +500V into a 50Ω load.
100 V/div, 200 ns/div.

- a) Output Signal Amplitude: 0 to +500V
- b) Pulse Width (FWHM): 100 ns - 100 us, 1% duty cycle
- c) Rise Time (20%-80%): < 30 ns
- d) Fall Time (20%-80%): < 30 ns
- e) PRF: 1 Hz - 10 kHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz.

Wide Pulse Test

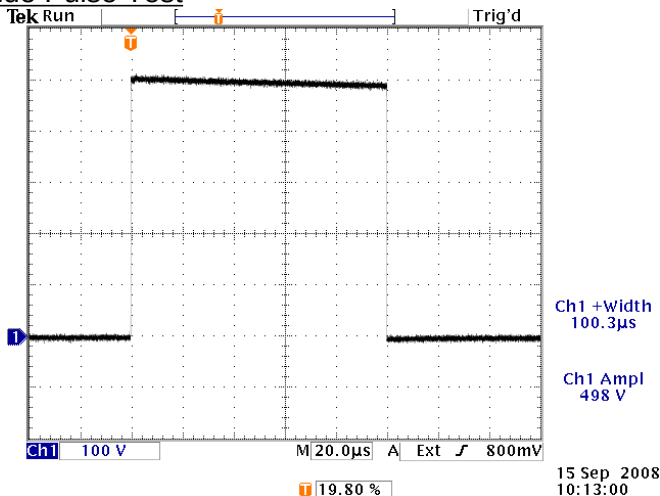

10 Hz, 100 us, +500V into a 50Ω load.
100 V/div, 20 us/div.

References levels: 20%, 80%

References levels: 20%, 80%.