



info@avtechpulse.com
http://www.avtechpulse.com/

Tel: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
Fax: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE
OTTAWA, CANADA K2C3H5


PERFORMANCE CHECKSHEET

Model: AVR-3-PW-TEK2-C-P-CC1
Type: High-Speed Pulse Generator
S.N.: 14043
Date: November 12, 2020

Output Amplitude: up to +250V, to 50Ω
Pulse Width (FWHM): 0.25 – 250 us
Rise Time (20%-80%): ≤ 10 ns
Fall Time (80%-20%): ≤ 10 ns
PRF: 1 Hz - 10 kHz
Jitter, Stability: OK
Prime Power: 120-240V AC, 50-60 Hz.


Basic specifications: →

Narrow Pulse, Voltage Waveform, No Shorting Bar

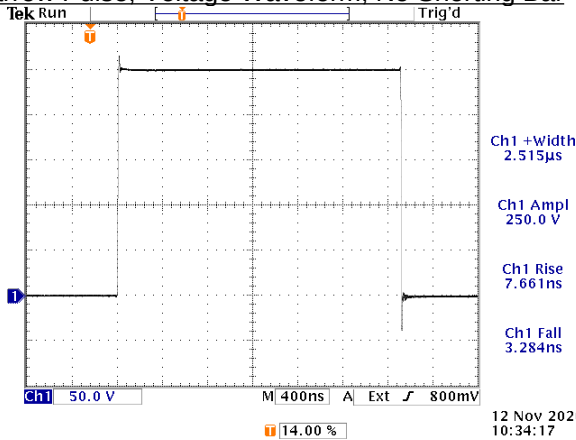


Output of "OUT" connector, terminated into the internal 50 Ohm load using a 12" length of RG-316 cable (i.e., no shorting bar). Viewed with TDS3052B scope. 50V/div, 400 ns/div. 10 Hz.

Wide Pulse, Voltage Waveform, No Shorting Bar

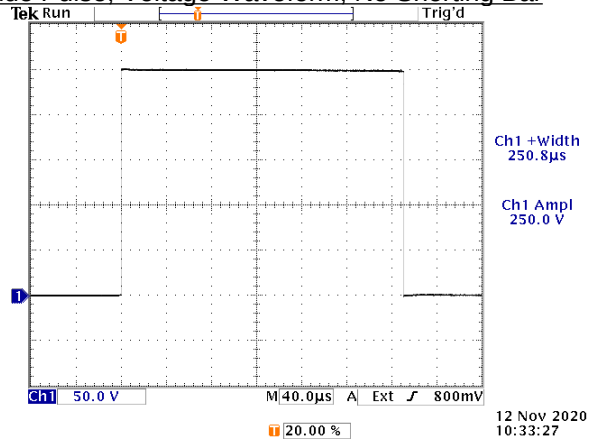


Output of "OUT" connector, terminated into the internal 50 Ohm load using a 12" length of RG-316 cable (i.e., no shorting bar). Viewed with TDS3052B scope. 50V/div, 40 us/div. 10 Hz.

Narrow Pulse to Shorting Bar and A6303 Probe

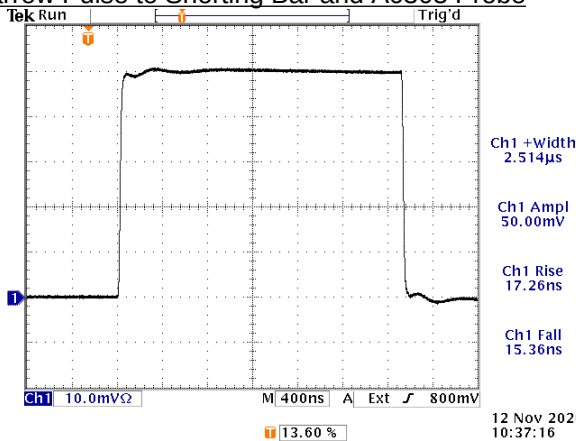

Output of A6303 probe and AM503B amplifier, viewed with TDS3052B scope. The A6303 probe is clamped to the shorting bar.

Wide Pulse to Shorting Bar and A6303 Probe

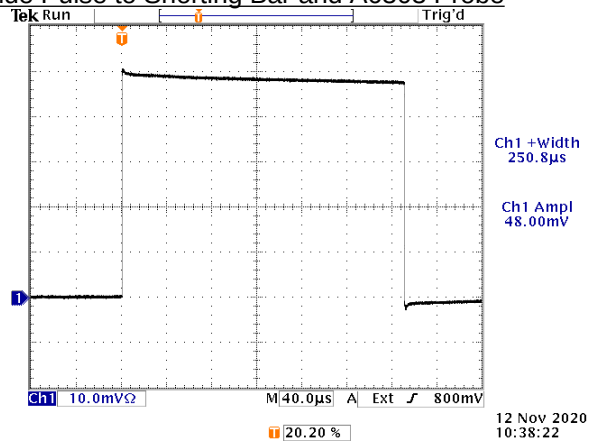

Output of A6303 / AM503B, viewed with TDS3052B scope. The probe is clamped to the shorting bar.

References levels: 20%, 80%