



info@avtechpulse.com  
http://www.avtechpulse.com/

Tel: 888-670-8729 (USA & Canada)  
or +1-613-686-6675 (Worldwide)

BOX 5120, LCD MERIVALE  
OTTAWA, CANADA K2C3H5

PERFORMANCE CHECKSHEET

Model: AVPP-1-B-PN-M-AK1-CC1-R5-OT  
Type: Ultra-High-Speed Pulse Generator  
S.N.: 14200  
Date: December 17, 2021

Output Amplitude: up to ±10V, to 50Ω  
Pulse Width (FWHM): 0.4 to 100 ns  
Rise Time (20%-80%): ≤ 120 or 150 ps  
Fall Time (80%-20%): ≤ 150 or 420 ps  
PRF: 1 Hz – 1 MHz  
Jitter, Stability: OK  
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →



Test Waveforms

100 kHz, 0.4 ns, +10V,

100 kHz, 3 ns, -10V,


1 ns/div. 5 V/div (50 mV/div × 40 dB):

1 ns/div. 5 V/div (50 mV/div × 40 dB):

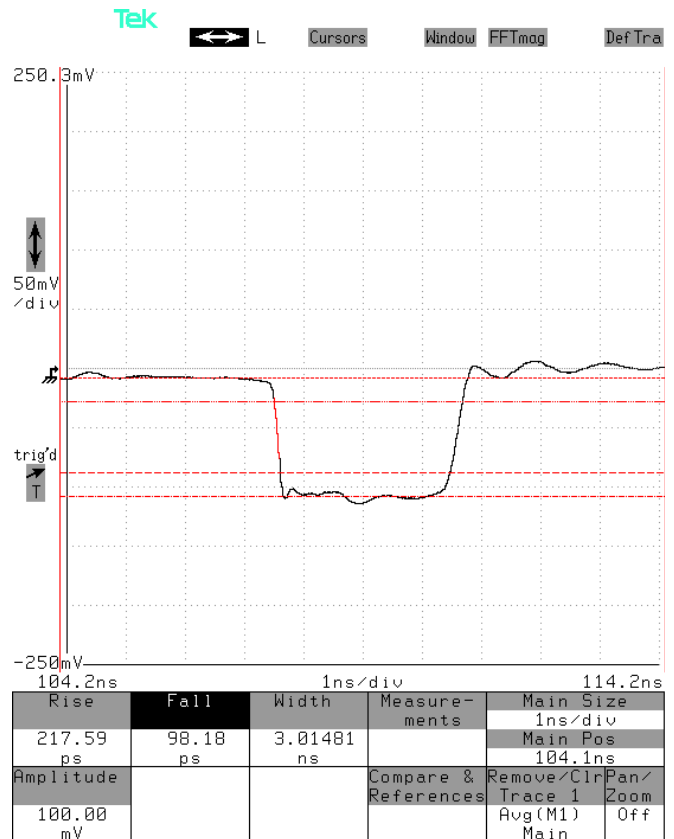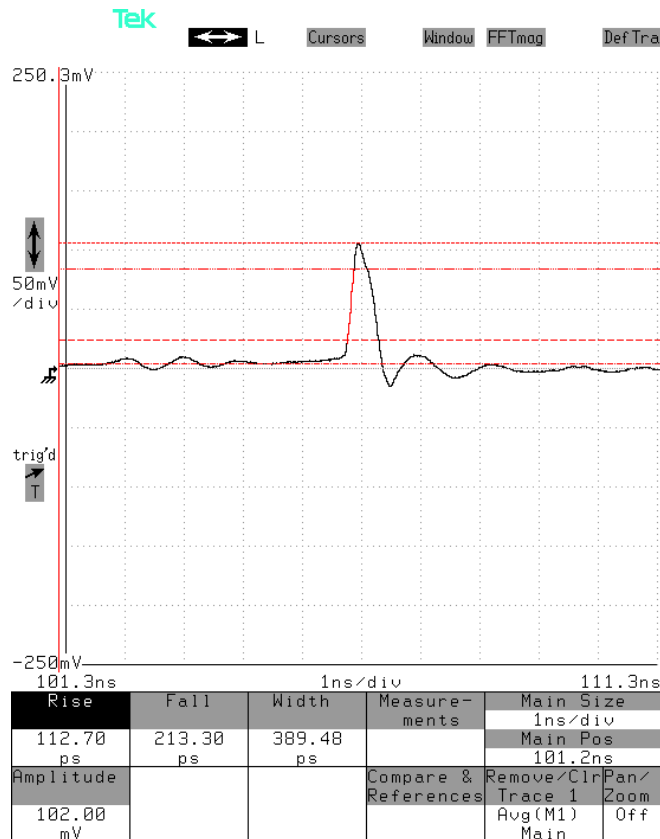


100 kHz, 30 ns, -10V,

5 ns/div. 5 V/div (50 mV/div × 40 dB):

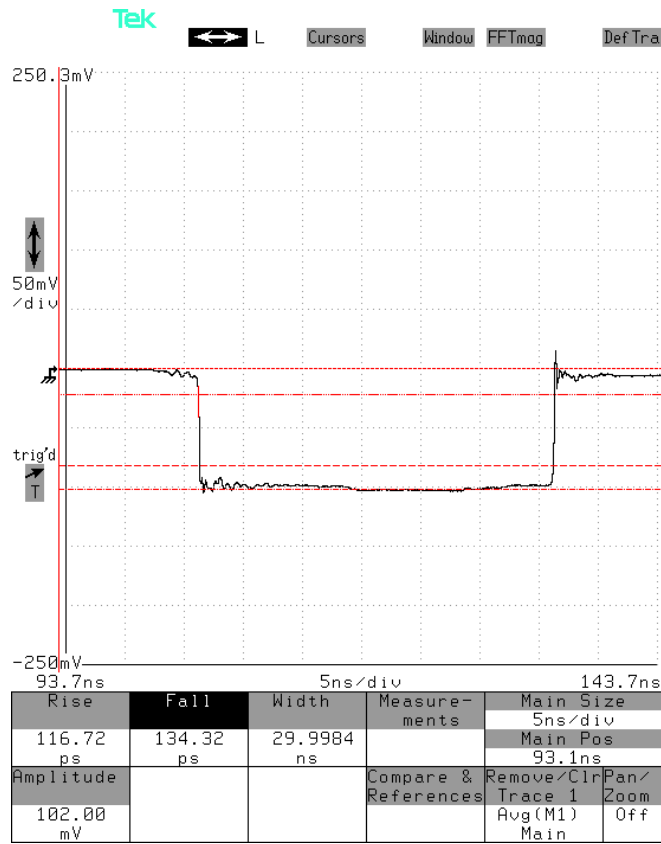


100 kHz, 100 ns, > +10V, full pulse

20 ns/div. 5 V/div (50 mV/div × 40 dB):

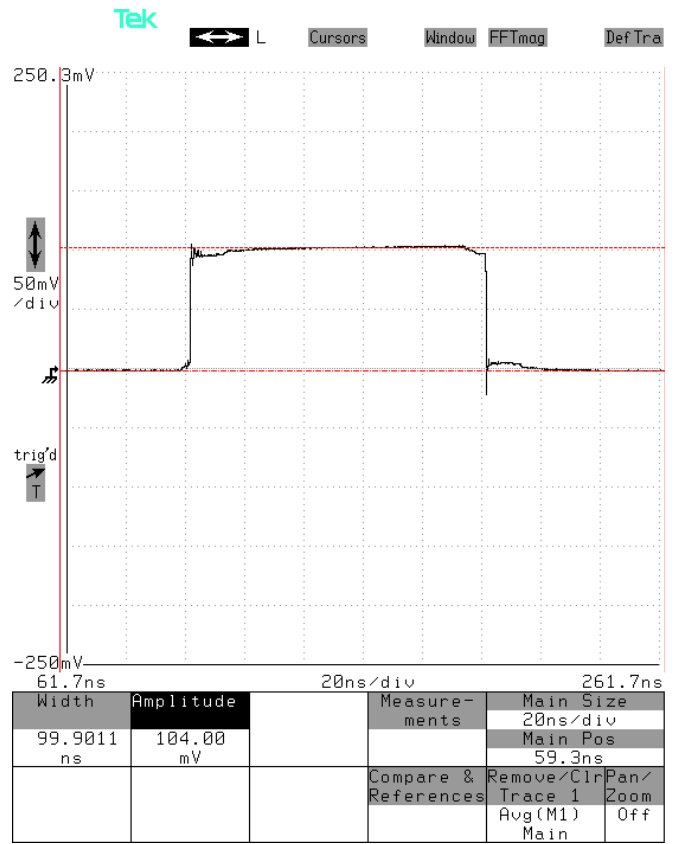

100 kHz, 100 ns, > +10V, leading edge,

1 ns/div. 5 V/div (50 mV/div × 40 dB):

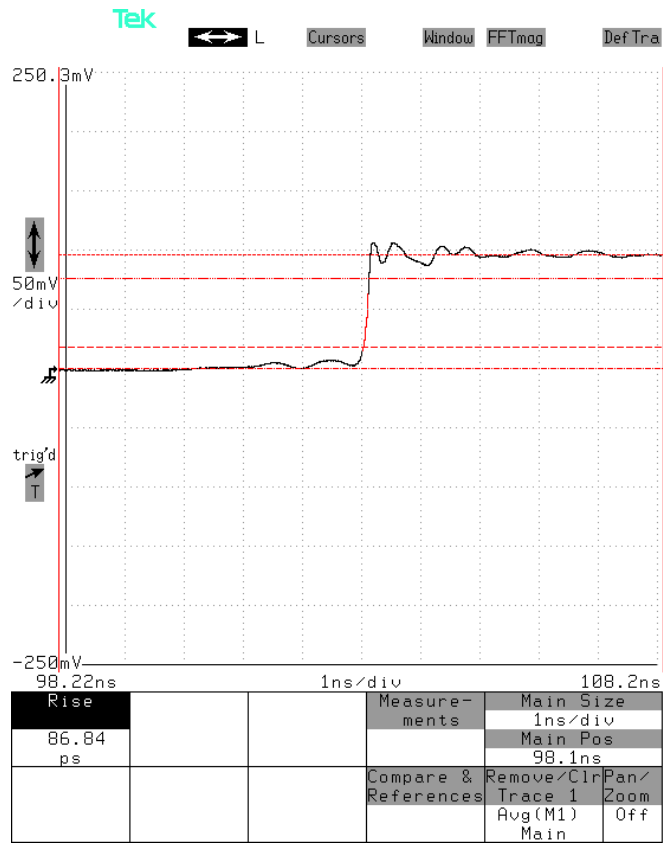

100 kHz, 100 ns, > +10V, trailing edge,

2 ns/div. 5 V/div (50 mV/div × 40 dB):

