



AVTECH ELECTROSYSTEMS LTD.

NANOSECOND WAVEFORM ELECTRONICS
SINCE 1975

P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AV-1030-C
Type: Ultra-High-Speed Pulse Generator
S.N.: 12781
Date: January 25, 2012

Output Amplitude: 0 to $\pm 5V$, to 50 Ω
Pulse Width (FWHM): 10 ns – 1 ms
Rise Time (20%-80%): ≤ 300 ps
Fall Time (80%-20%): ≤ 350 ps
PRF: 1 Hz - 10 MHz
Jitter, Stability: OK
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →



Test Waveforms

10 MHz, > +5V, 10 ns PW:

1 MHz, > -5V, 25 ns PW:


2 ns/div. 2 V/div (20 mV \times 40 dB):

5 ns/div. 2 V/div (20 mV \times 40 dB):

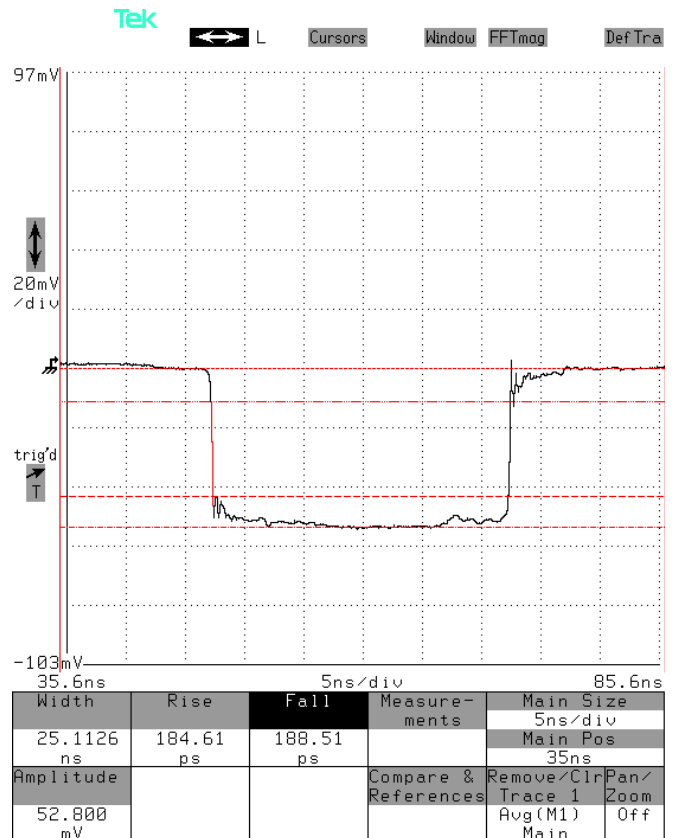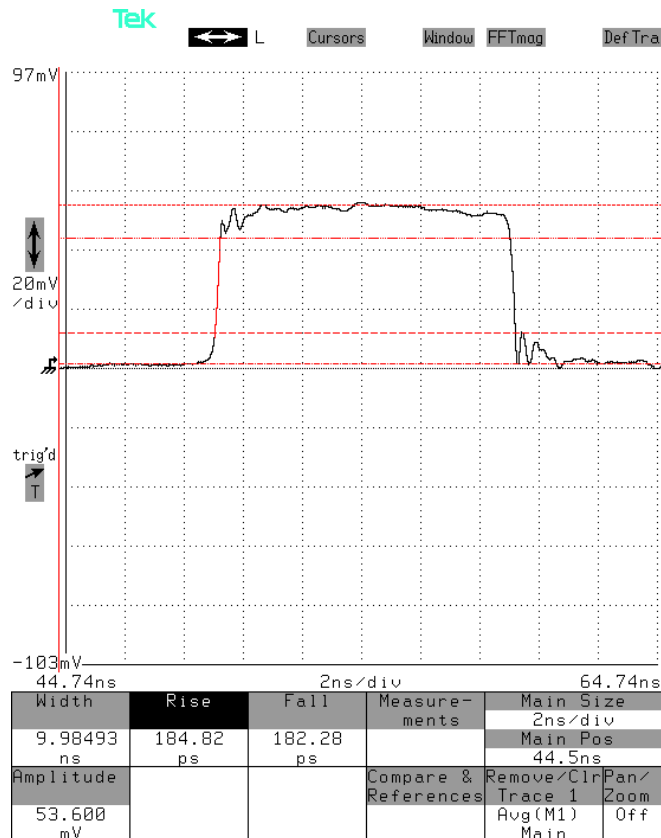

10 kHz, > +5V, 100 ns PW, rising edge shown,

2 ns/div. 2 V/div (20 mV × 40 dB):

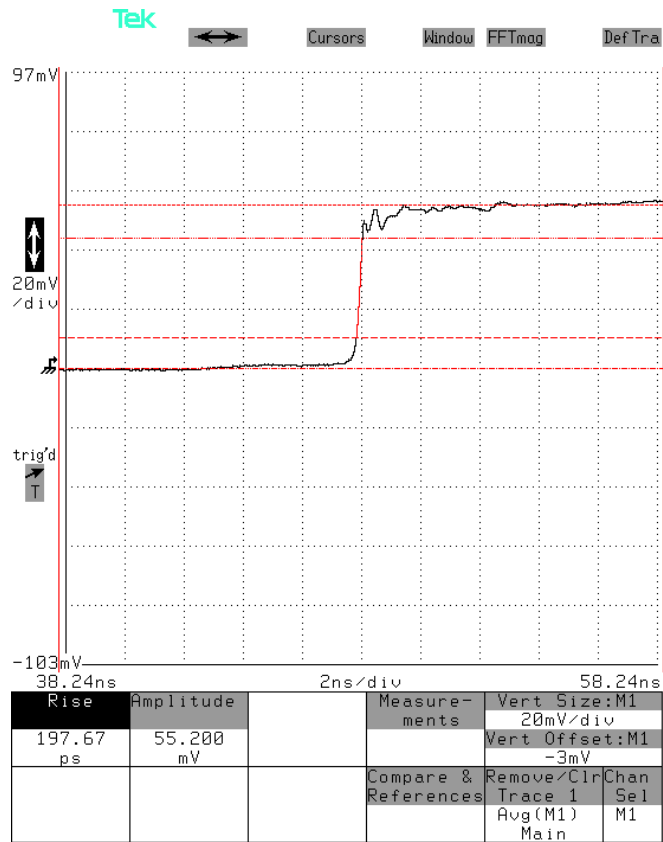

10 kHz, > +5V, 100 ns PW, falling edge shown,

2 ns/div. 2 V/div (20 mV × 40 dB):

