



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)  
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)


BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H5

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AV-112C-PS  
Type: High-Voltage Variable-Gain Linear Amplifier  
S.N.: 13711  
Date: April 18, 2018


Square Wave / Rise Time Test

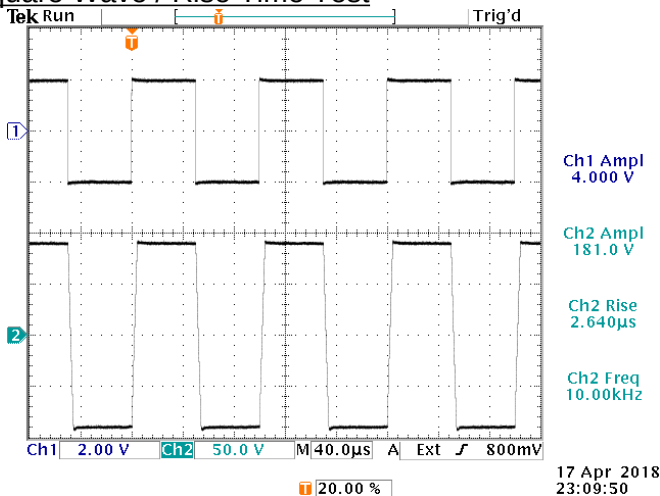

Top: Input, ±2V, 10 kHz, square. 2 V/div, 40 us/div  
Bottom: Output, ±90V, to 97.5Ω. 50V/div, 40 us/div.

- a) Output Signal Amplitude: 0 to ±90V to  $R \geq 100 \Omega$
- b) Gain: x1 to x45
- c) Rise Time:  $\leq 3 \mu s$
- d) Fall Time:  $\leq 3 \mu s$
- e) PRF: DC - 30 kHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V, 50-60 Hz.

Sine Wave / Bandwidth Test

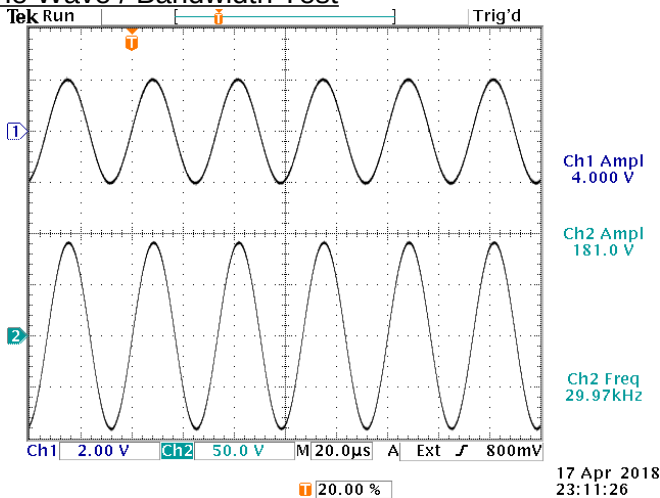

Top: Input, ±2V, 30 kHz, sine. 2 V/div, 20 us/div  
Bottom: Output, ±90V, to 97.5Ω. 50V/div, 20 us/div.

References levels: 20%, 80%.