




info@avtechpulse.com  
http://www.avtechpulse.com/

Tel: 888-670-8729 (USA & Canada)  
or +1-613-686-6675 (Worldwide)

BOX 5120, LCD MERIVALE  
OTTAWA, CANADA K2C3H5

PERFORMANCE CHECKSHEET

Model: AV-156E-B  
Type: Dual-Channel Pulsed-Constant-Current Generator  
S.N.: 14554  
Date: February 24, 2025

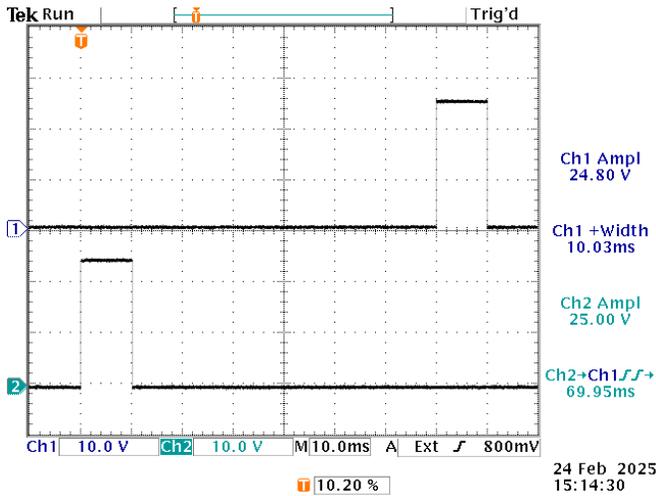

Top: OUT1, 5A into 5Ω load, 10 ms PW, 70 ms delay  
Bottom: OUT2, 5A into 5Ω load, 10 ms PW  
Both: 10 V/div, 10 ms/div, PRF = 1 Hz.

a) Output Signal Amplitude: 0 - 5A

b) Pulse Width (FWHM): 1 - 100 ms

c) Rise Time (20%-80%): < 10 us


d) Fall Time (80%-20%): < 10 us

e) PRF: 1 - 100 Hz

f) Jitter, Stability: OK

g) Prime Power: 100-240V, 50-60 Hz

h) Inter-channel delay: 0 - 1000 ms

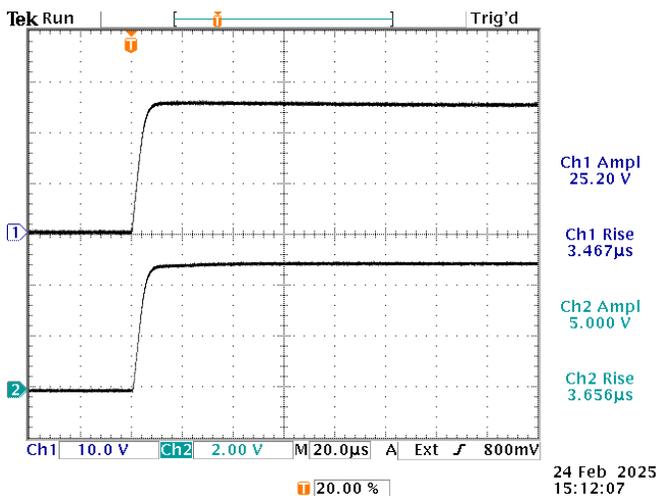

Top: OUT2, 5A into 5.018Ω load, 10 ms PW, 10 V/div.  
Bottom: MON2 into open circuit, 2V/div.  
Both: PRF = 1 Hz, 20 us/div.

Waveform references levels: 20%, 80%.