



info@avtechpulse.com
http://www.avtechpulse.com/

Tel: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
Fax: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE
OTTAWA, CANADA K2C3H5

PERFORMANCE CHECKSHEET

Model: AVX-T
Type: Ultra-High-Speed Bias Tee
S.N.: 14122
Date: March 5, 2021

Basic specifications -



Pulse/DC voltage limit: 200V
DC current limit: 0.5A
Pulse width range: 0.2 – 50 ns
Rise time (20%-80%): < 60 ps

Rise Time Test

102.1 ps rise time, -7V input to AVX-T,
1 ns/div. 2 V/div (200 mV/div × 20 dB):

Corresponding output of AVX-T with +7V DC bias added,

1 ns/div. 2 V/div (200 mV/div × 20 dB):

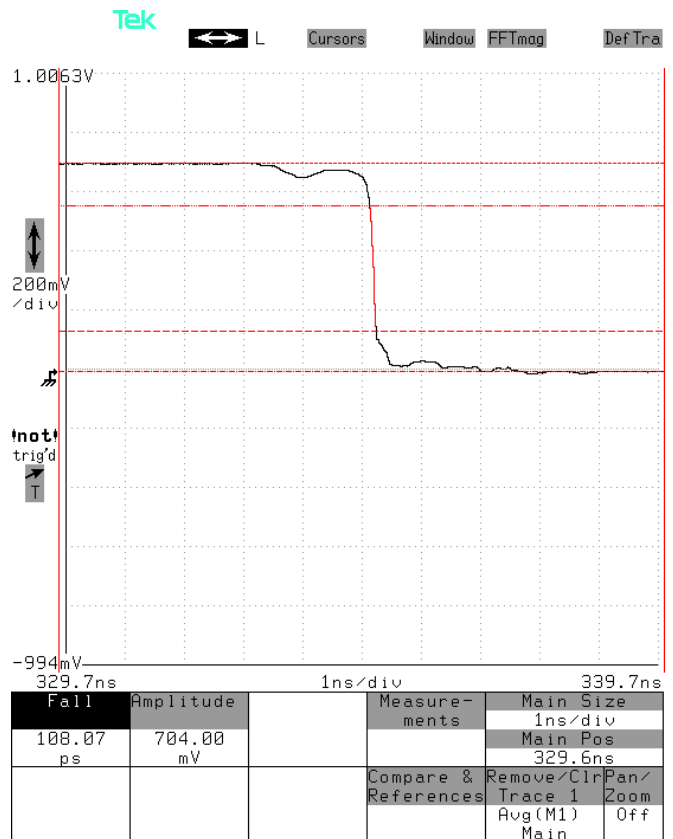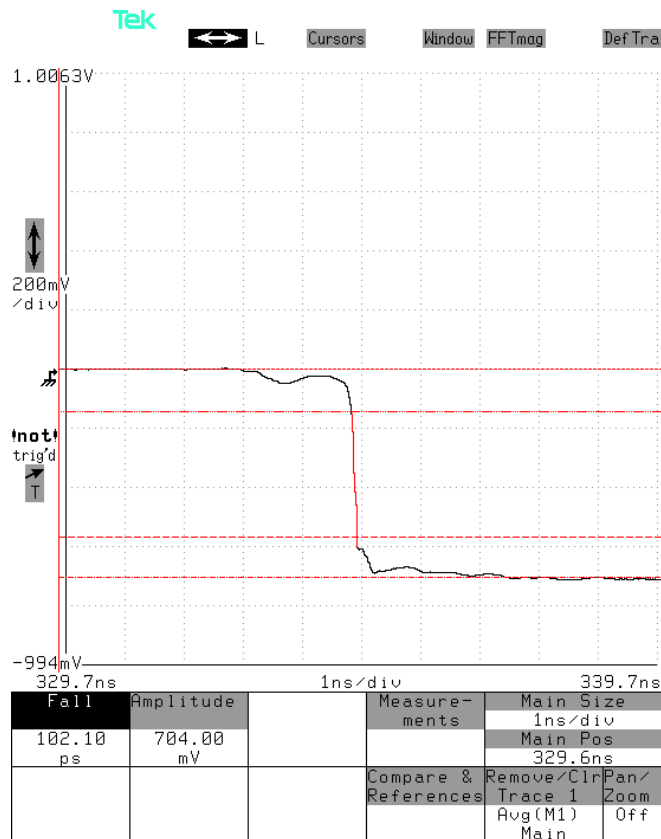


The output rise time should be less than $\sqrt{(102.1ps^2 + 60ps^2)} = 118.4$ ps. The measured rise time does satisfy this limit.

Maximum Amplitude / PW / Offset Test

200V. 50 ns input to AVX-T, generated by an Avtech AVIR-3-B pulser

10 ns/div. 50 V/div (50 mV/div × 60 dB):

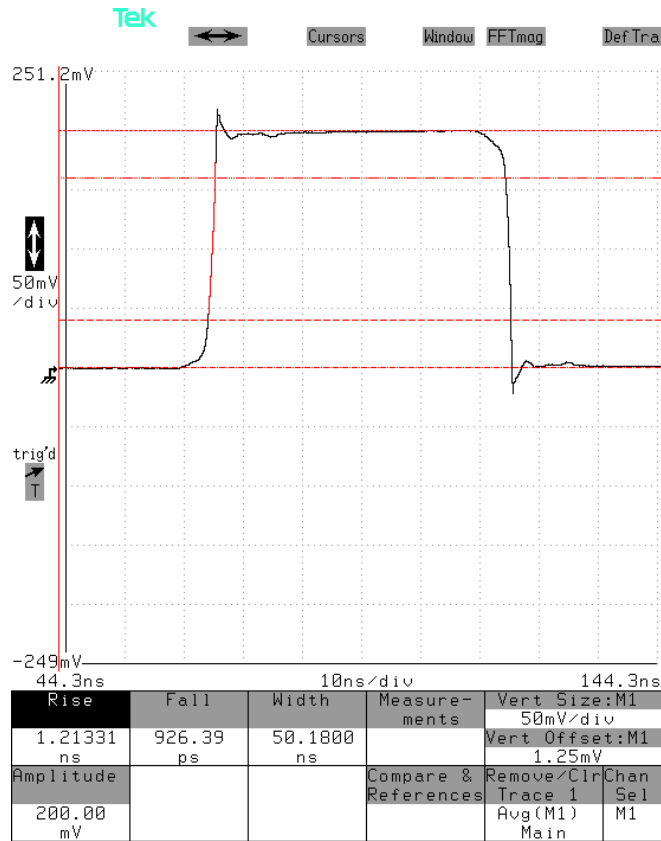

Corresponding output of AVX-T with +25V DC bias added,

10 ns/div. 50 V/div (50 mV/div × 60 dB):

