



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)


BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H5

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AV-1023-C
Type: General-Purpose Dual-Channel Pulse Generator
S.N.: 13368
Date: November 6, 2015

Complex Waveform Test

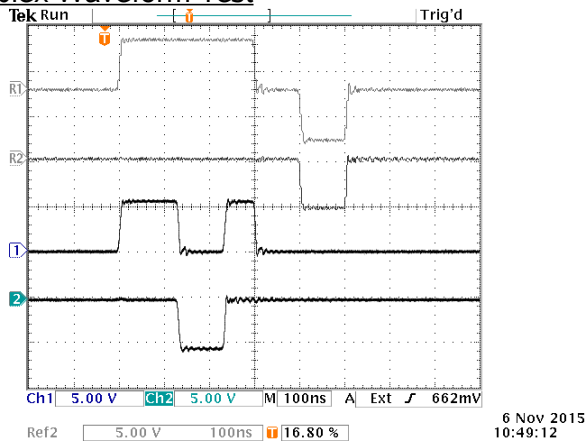


- a) Output Signal Amplitude: 0 to ±10V
- b) Pulse Width (FWHM): 50 ns - 500 ms
- c) Rise Time (20%-80%): < 10 ns
- d) Fall Time (80%-20%): < 10 ns
- e) PRF: 1 Hz - 10 MHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz

Waveforms, Top to Bottom:

- 1) A+B, A has +5V amplitude, B has -5V ampl.
- 2) B
- 3) Same as 1, but with B delay reduced
- 4) Same as 2, but with B delay reduced

All: 5V/div, 100 ns/div. R_{LOAD} = 50Ω, Z_{OUT} = 50Ω

Rise & Fall Time Test

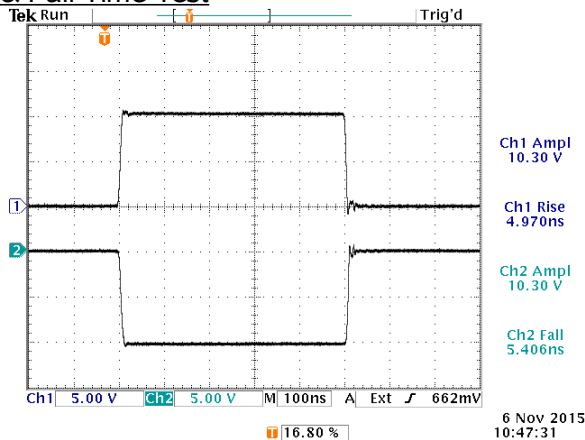

Top: OUT A, > +10V to 50Ω. 5 V/div, 100 ns/div.
Bottom: OUT B, > -10V to 50Ω. 5 V/div, 100 ns/div.